asanpump
t.me/asanpump
www.asanpump.com
asan.pump@gmail.com

Performance Curve

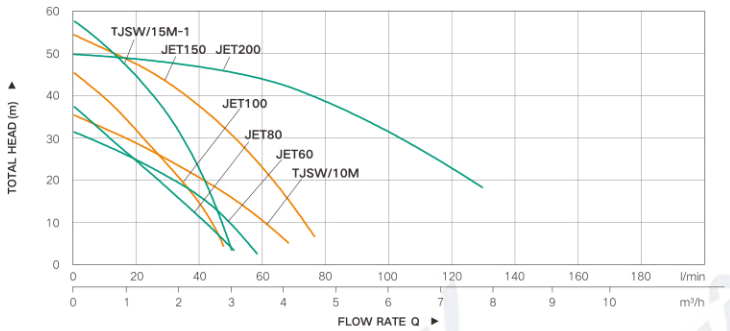

Performance Parameters

Model	Power		Max.suct	Inlet/Outlet	Max.flow	Q(m³/h)	0	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	7.5
	kW	HP	(m)	In	(l/min)	Q(l/min)	0	8	17	25	33	42	50	58	67	75	83	100	117	125
JET60	0.37	0.5	9	1"x1"	53	H(m)	32	29	26	22	20	15	10							
JET80	0.55	0.75	9	1"x1"	53		38	32	27	21	20	16	8							
JET100	0.75	1	9	1"x1"	48		46	40	32	26	21	14								
JET150	1.1	1.5	9	1.5"x1"	76		55	51	48	46	42	36	31	26	17	4				
JET200	1.5	2	9	1.5"x1"	127		50.5	50	49.5	49	48	47	46	45	43	41	38	32	25	20
TJSW/10M	0.75	1	9	1"x1"	70		36	33	30	26	24	20	16	12	7					
TJSW/15M-1	1.1	1.5	9	1"x1"	50		58	54	48	39	32	20	4							

Product Structure

NO.	Part	NO.	Part	NO.	Part	NO.	Part	NO.	Part
1	Pump body	9	Locknut	17	Seal sheath	25	Motor end cover	33	Screw
2	Screw	10	Washer	18	Bolt	26	Screw	34	Motor foot
3	O-ring	11	Impeller	19	Terminal box	27	Fan	35	Motor body
4	Seal	12	Mechanical seal	20	Capacitor	28	Bolt	36	Stator
5	O-ring	13	Dam-board	21	Cable sheath	29	Fan cover	37	Bearing
6	Ejector	14	O-ring	22	Terminal block	30	Screw	38	Rotor
7	O-ring	15	Water washer	23	Shaft key	31	O-ring	39	Bearing
8	Diffusor	16	Motor front cover	24	Spring washer	32	Screw		

SGJ/PGJ

Priming Pump



- Small in size
- Light in weight
- Compact in structure
- Easy to install

Model Description

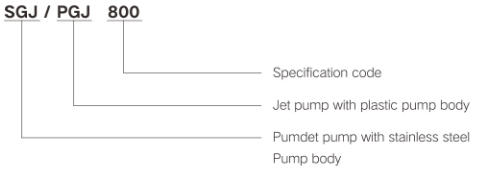

Application Range

- This series of electric pumps are small in size, light in weight, compact in structure, and easy to install.It is suitable for conveying liquids that are clean, contain no solid particles or fibers, and do not cause obvious corrosion to stainless steel.

Working Conditions

- Ambient temperature is 0℃~+45℃
- The medium temperature does not exceed +40℃
- The PH of the medium is between 6.5-8.5
- The volume ratio of solid impurities is not more than 0.1% and the particle size is not more than 0.2mm

Motor and Pump Body

- Wide voltage operation
- Higher temperature resistance of the motor: F-class insulation, temperature resistance of 155℃
- Stainless steel welded motor shaft, rust-proof and longer service life.
- Pump body and impeller are made of rust-proof material: no water pollution

Packing Dimensions



Model	L	W	H
	cm	cm	cm
SGJ300/PGJ300	34.6	19.1	20.3
SGJ400/PGJ400	34.6	19.1	20.3
SGJ600/SGJ600	50.5	32.5	17.86
SGJ800/SGJ800	42	19.5	23

تلفن: ۱۰٤ ۲۲ ۸۸۸ ۰۲۱ ـ ۲۹۱ ٤۶ ۸۸۸ ۰۲۱
تلفن همراه: ۰۹ ٤۷۹ ۰۹ ۰۹۱۲
آدرس: تهران ـ خیابان طالقانی ـ خیابان ملک الشعراءِ بهار ـ پاساژ بک ـ طبقه شش ـ واحد چهار